



Product information

Periphery module

PM MIO84

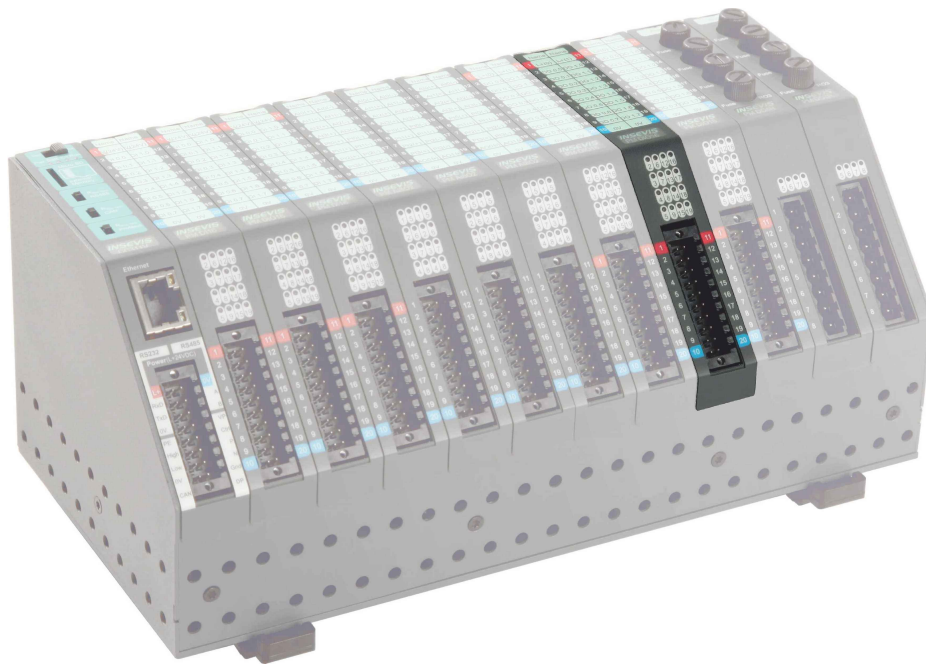

Changes to older versions of this document

- Rev. 1 → 2: red error flag of a Out deleted, resolution of a In now 12...16 Bit
- Rev. 2 → 3: address range in process image corrected
- Rev. 3 → 4: LED-references corrected in images
- Rev. 4 → 5: Counter description (like PC351)
- Rev. 5 → 6: digital input threshold voltage
- Rev. 6 → 7: information for disposal of old equipment
- Rev. 7 → 8: description for counter inputs improved

Description

compact periphery module for


8 digital transistor outputs 24V with back-readable inputs

- green diagnostic LED for each in-/ output
- insertion stripe with description field for every signal
- cage-clamp connector with bolt flanges on side
- **Scope of delivery:**
 - technical information
 - brief instruction


INSEVIS-benefit:

Each single outputs can be switched off, so that you can realize different ratios of I/Os e.g. 6dI and 2dO or 3dI and 5dO. Only the total sum of I/Os must be ≤ 8 .


for digital signals (2- and 3-/4-wire-switches)

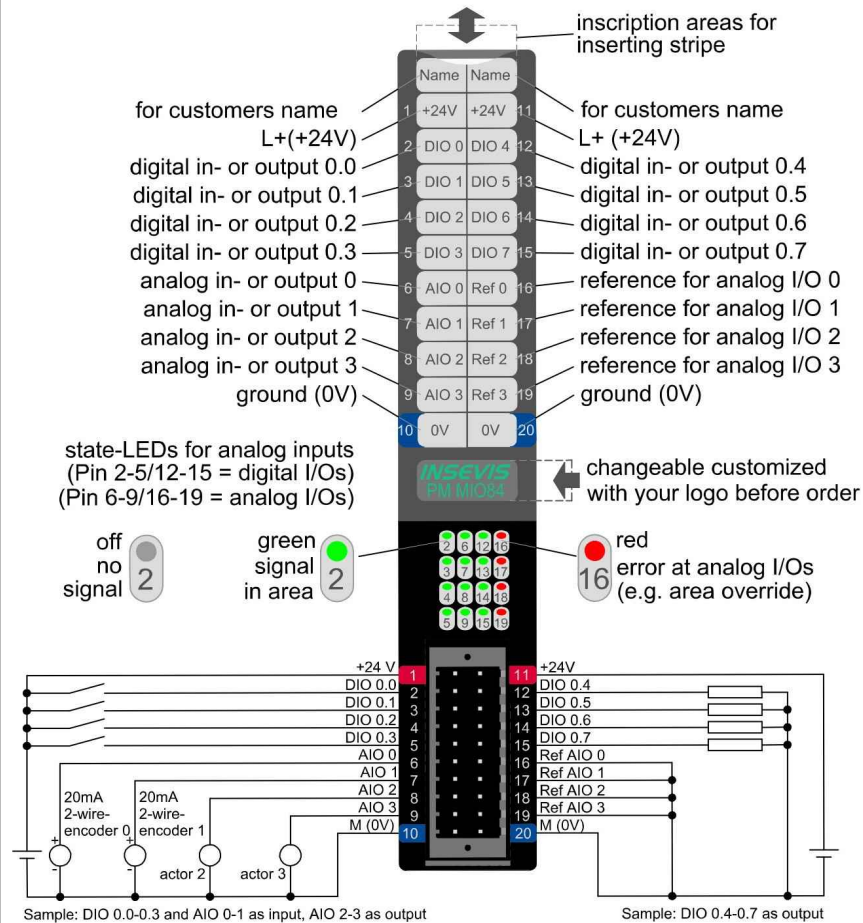

above: Description and wiring of MIO84 for 2-wire switches

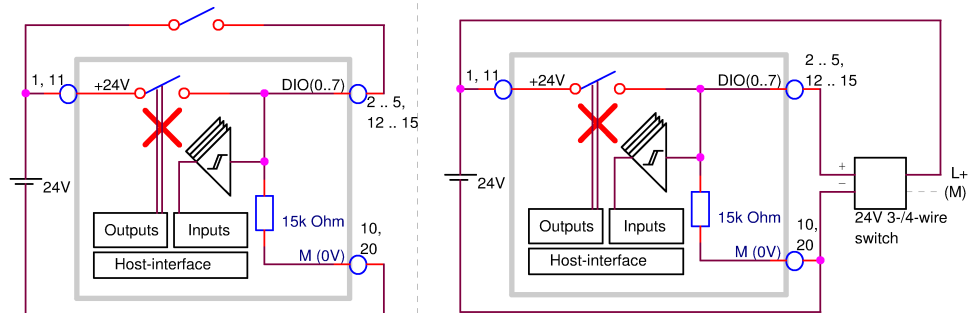

above: Block diagram of digital inputs for 2-wire-switches (left) and 3-/4-wire-switches (right)

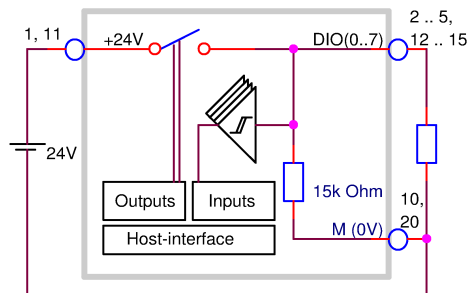

above: Block diagram of backreadable outputs

Digital	Input address		Output address	
	Disable the output			
Channel 0.0	16.0	<input checked="" type="checkbox"/>		
Channel 0.1	16.1	<input checked="" type="checkbox"/>		
Channel 0.2	16.2	<input type="checkbox"/>		16.2
Channel 0.3	16.3	<input type="checkbox"/>		16.3
Channel 0.4	16.4	<input checked="" type="checkbox"/>		
Channel 0.5	16.5	<input type="checkbox"/>		16.5
Channel 0.6	16.6	<input type="checkbox"/>		16.6
Channel 0.7	16.7	<input type="checkbox"/>		16.7

above: Configuration block of I/O-parametrizing in the ConfigStage

Description

- 4 analog in- or outputs configurable by software

Inputs:

- 0..10V, 0 (4)..20 mA for 2-wire-encoders including encoder supply
- 4..20 mA or ± 20 mA for 4-wire-encoders

Outputs:

- 0..10V
- 0 (4)..20 mA

- Resolution 12 ... 16 Bit (depending on integration time)

- green diagnostic-LEDs
 - LED 6 for A I/O 0
 - LED 7 for A I/O 1
 - LED 8 for A I/O 2
 - LED 9 for A I/O 3

- red diagnostic-LEDs for errors (override or short circuit on AI)
 - LED 16 for A I/O 0
 - LED 17 for A I/O 1
 - LED 18 for A I/O 2
 - LED 19 for A I/O 3

- insertion stripe with description field for every signal

- cage-clamp connector with bolt flanges on side

• Scope of delivery:

- technical information
- brief instruction


Hint:

Connect Ref AIO 0..3 with ground (0V) always


INSEVIS-benefit:

This module has an internal supply for the 2-wire encoders. So it is not necessary to care for external supply!

for analog inputs (2-wire-encoders)

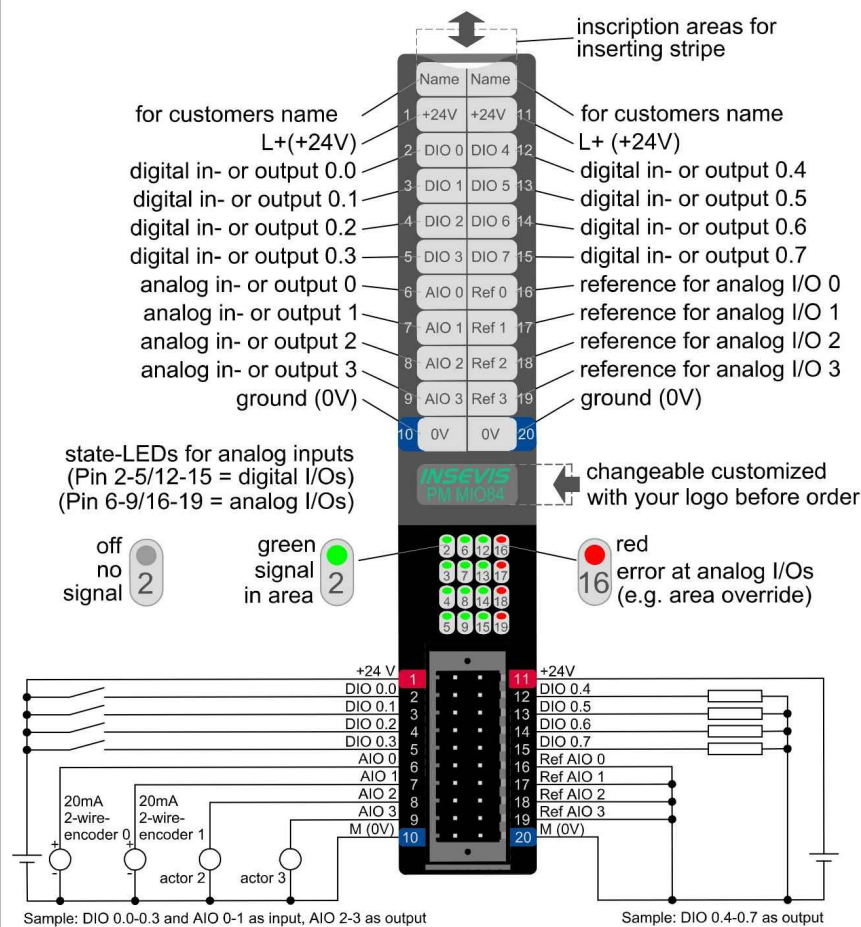

above: Description and wiring of all connections of PM MIO84 with 2-wire encoders

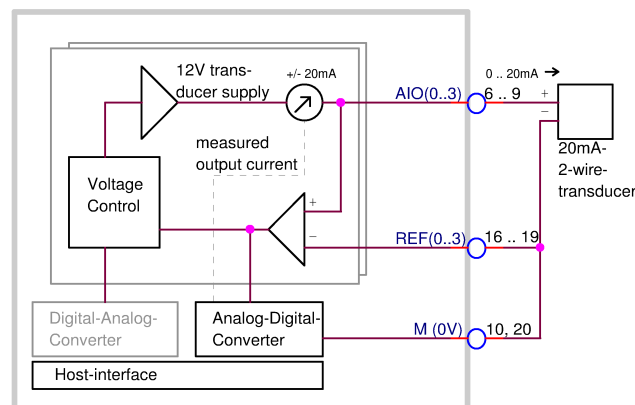

above: Block diagram for 2-wire-encoders (0..20mA)

Analog			
Integration time [ms]:			
	Type	Mode	Address
Channel 1:	Input	0..10V	8
Channel 2:	Input	4..20mA (2-wire)	10
Channel 3:	Output	0..10V	12
Channel 4:	Output	4..20mA	14

above: Configuration block of I/O-parametrizing in the ConfigStage

Description

- 4 analog in- or outputs configurable by software

Inputs:
 - 0..10V, 0 (4)..20 mA for 2-wire-encoders including encoder supply
 - 4..20 mA or ± 20 mA for 4-wire-encoders

Outputs:

- 0..10V
 - 0 (4)..20 mA

• Resolution 12 ... 16 Bit (depending on integration time)

• green diagnostic-LEDs
 - LED 6 for A I/O 0
 - LED 7 for A I/O 1
 - LED 8 for A I/O 2
 - LED 9 for A I/O 3

• red diagnostic-LEDs for errors (override or short circuit on AI)
 - LED 16 for A I/O 0
 - LED 17 for A I/O 1
 - LED 18 for A I/O 2
 - LED 19 for A I/O 3

• insertion stripe with description field for every signal

• cage-clamp connector with bolt flanges on side


• Scope of delivery:

- technical information
- brief instruction


Hint:

Connect Ref AIO 0..3 with ground (0V) always


for analog inputs (3-/4-wire-encoders)

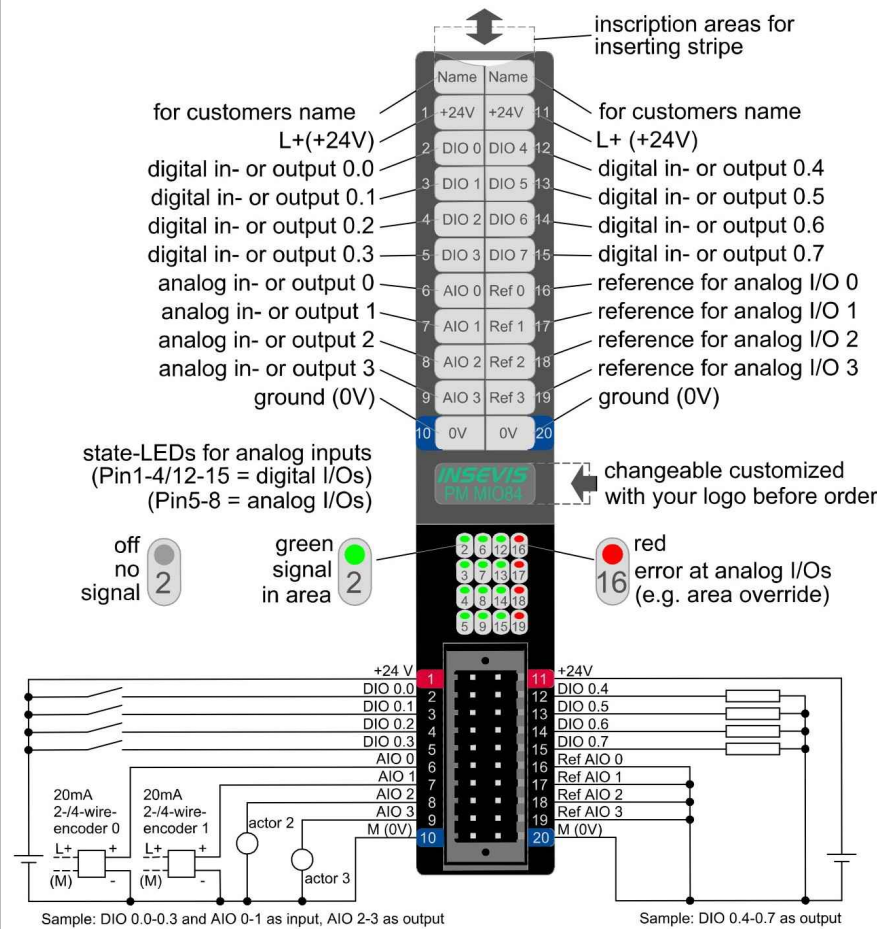

above: Description and wiring of all connections of PM MIO84 with 3-/4-wire encoders

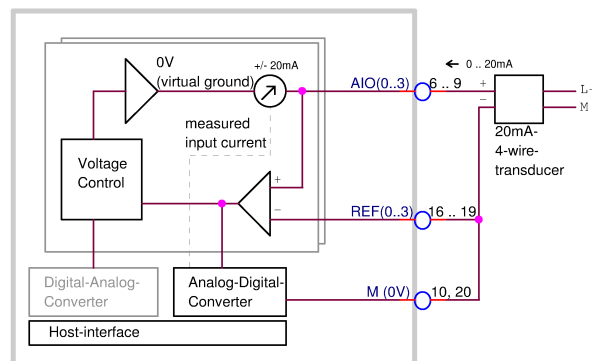

left: Block diagram for 3-/4-wire-encoders (0...20mA)

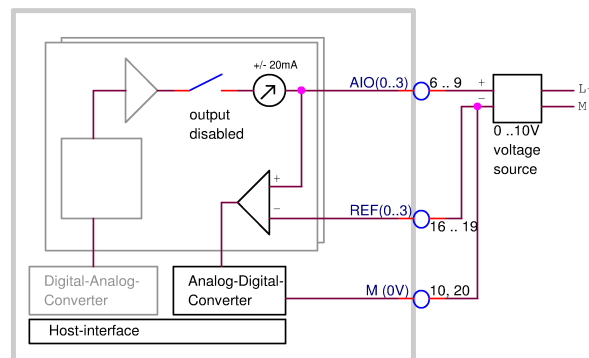

left: Block diagram for 3-/4-wire-encoders (0...10V)

Description

- 4 analog in- or outputs configurable by software

Inputs:
 - 0..10V, 0 (4)..20 mA for 2-wire-encoders including encoder supply
 - 4..20 mA or ± 20 mA for 4-wire-encoders

Outputs:

- 0..10V
 - 0 (4)..20 mA

• Resolution 12 ... 16 Bit (depending on integration time)

• green diagnostic-LEDs
 - LED 6 for A I/O 0
 - LED 7 for A I/O 1
 - LED 8 for A I/O 2
 - LED 9 for A I/O 3

• red diagnostic-LEDs for errors (override or short circuit on AI)
 - LED 16 for A I/O 0
 - LED 17 for A I/O 1
 - LED 18 for A I/O 2
 - LED 19 for A I/O 3

• insertion stripe with description field for every signal
 • cage-clamp connector with bolt flanges on side


• Scope of delivery:

- technical information
- brief instruction


Hint:

Connect Ref AIO 0..3 with ground (0V) always


for analog outputs

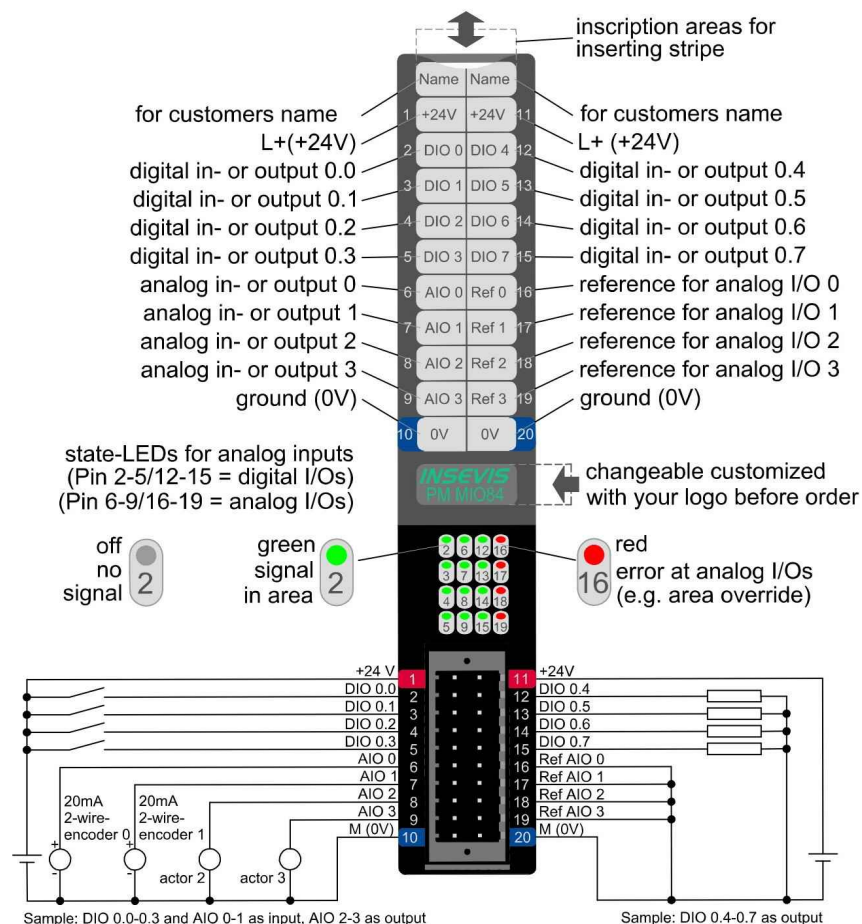

above: Description and wiring of all connections of PM MIO84 for analog outputs

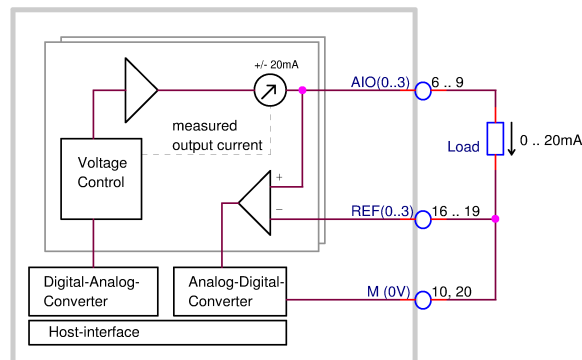

left: Block diagram for analog outputs (0...20mA)

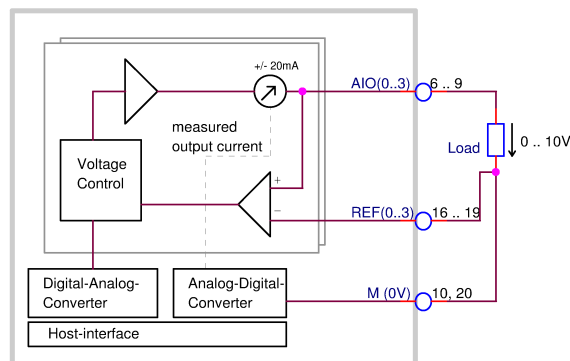

left: Block diagram for analog outputs (0...10V)

Configuration of the counter inputs

Counter Channel 1 (settings by ConfigStage)

Configuration „counting forward (up)“

→ rising edges at input DI 0.0 will be counted

Configuration „counting for- / backwards (down)“

→ rising edges at input DI 0.0 will be counted and

→ input DI 0.1 is used as direction bit

(0=backwards, 1=forward)

Configuration „Encoder“

→ inputs DI 0.0 and DI 0.1 represent the encoder interface with quadruple evaluation

Counter		
	Configuration	Address
Channel 1:	Count up	16
Channel 2:	Disabled	20
	Count up	
	Up/Down (Pulse/Dir)	
	Encoder (x4)	

In " Address " the number of the input double word is displayed, which contains the counter value.

Counter Channel 2 (settings by ConfigStage)

Configuration „counting forward (up)“

→ rising edges at input DI 0.2 will be counted

Configuration „counting for- / backwards (down)“

→ rising edges at input DI 0.2 will be counted and

→ input DI 0.3 is used as direction bit

(0=backwards, 1=forward)

Configuration „Encoder“

→ inputs DI 0.2 and DI 0.3 represent the encoder interface with quadruple evaluation

Counter		
	Configuration	Address
Channel 1:	Count up	16
Channel 2:	Disabled	20
	Count up	
	Up/Down (Pulse/Dir)	
	Encoder (x4)	

In " Address " the number of the input double word is displayed, which contains the counter value.

Hints for usage of the counter inputs

All following addresses are specified as offset related to configured start address of the MIO84 module!

onboard:

- read in counter by reading of ED16 / ED20 (synchronous to control point)
- set counter by writing to PAD16 / PAD20 (by direct periphery access only)
- this configuration can be modified in runtime with Step7 too:

configuration word for counter 1 is PAW24

configuration word for counter 2 is PAW28

"inactive" 0x00

"counting forward / up" 0x01

"for- / backward (pulse, direction)" 0x02

"encoder (x4)" 0x03

decentral:

- read in counter by reading of ED12 / ED16 (synchronous to control point)
- direct periphery access is implemented for decentral periphery only for data which are mapped into the process image.
- to set counters or write configuration use CANopen objects via SDO access.

configuration word for counter 1 object index 0x3010 + slot-1, subindex 6

configuration word for counter 2 object index 0x3010 + slot-1, subindex 7

setpoint counter 1 (dw) object index 0x3100 + slot-1, subindex 1

setpoint counter 2 (dw) object index 0x3100 + slot-1, subindex 2

Technical data	digital in-/ outputs		
Load voltage L+ Power dissipation Connection technology	24V DC (10 V ... 30 V DC) internal limited cage clamp technology for cross section up to max. 1,5mm ²	Wire length unshielded (max.) shielded (max.)	30 m 100 m
Digital in- / outputs	8 in- or outputs	Outputs: switch on delay switch off delay Inputs: switch on delay switch off delay	50 µs (typ.) 30 µs (typ., without load)
Diagnostic LEDs	8, green		25µs
Output current for signal 0 for signal 1	0,5 mA (max.) 0,5 A (max. to 60°C)	Max. switching frequency of outputs	100 Hz with ohmic load
Cumulated current	2 A (max. to 60°C)	Counter	2 each as forward counter, forward/backward counter or incremental encoder 10 kHz
Frequency limit			
Broken wire detection Error diagnostic Potential separation to PLC	no no	Signal level of outputs for signal 0 for signal 1 Signal level of inputs for signal 0 for signal 1	1,0 V at 500 Ω (max.) L+ - 1,0 V at 0,5 A load (min.) 0V ... +5 V +10,5V ... +30 V

Technical data	analog in-/ outputs		
Load voltage L+	24V DC (17 V ... 30 V DC) connected by device supply	Wire length unshielded (max.) shielded (max.)	30 m 100 m
Analog inputs	4 (alternatively to outputs what is to be configured by software) ±20 mA, 4...20 mA, 0...10 V	Valid voltage between inputs and A-GND (max.)	-1 V ... +24 V DC
Input areas			
Diagnostic LEDs	4 green: signal in valid area 4 red: override or saturation no displaying broken wires and open inputs	Error message during override metering area	adjustable diagnosis- and limit value alert on request
Value number format	9400 ... 6C00 (hexadecimal) for range ± 20 mA all other 0000 ... 6C00 (hexadecimal)	Broken wire detection	by overrun / shortfall of metering area
Override area	20 mA ... 22 mA 10V ... 11,3 V	Access of sensor	unsymetric against A-GND (single ended)
Input resistance	0Ω (typ.) for metering area current 1MΩ (typ.) for metering area voltage	Metering principle / conversion principle Resolution	successive approximation 12...16Bit (depending on integration time assigned in ConfigStage)
Sampling cycle time = Integration time	adjustable 1ms ... 35767 ms default: 100 ms (=line frequency filter 50Hz and 60Hz)	Deviation (based on input area)	< 1%
Analog outputs	4 (alternatively to inputs what is to be configured by software) 0(4)...20 mA, 0...10V	Value number format	0000 ... 6C00 (hexadecimal)
Output area (nominal values)			
Resolution	15 Bit ΣΔ-Modulation	Short cut protection	yes
Diagnostic LEDs	4 green: signal in valid area 4 red: override or Load error	Override area	20 ... 23 mA 10 ... 11,3 V
Setting time: response time τ (typ)	1,5 ms	Short cut current (typ.)	20 mA (at 10V) 32 mA (at mA)
Load resistance against A-GND	mA: 500 Ω (max.) V: 1 kΩ (min.)	Deviation (based on output area)	< 1%

Configuration of the **process image onboard**:
module allocates 24 bytes of process data input and output.

Offset	I/O	Function	Description
0, 2, 4, 6	I	Input AI 0..AI 3	Measuring range according to configuration - in voltage output mode: measure of output current - in current output mode: measure of output voltage
0, 2, 4, 6	O	Output AO0..AO 3	Measuring range according to configuration - in input mode: ignored
8	I	Digital inputs .0 to .7	(Byte access)
8	O	Digital outputs .0 to .7	(Byte access)
9 ... 15	I/O	Reserved	
16, 20	I/O	Counter 0, 1	Counter value (DINT, DWORD access)

Configuration of the **process image as decentral periphery**:
module allocates 20 bytes of process data input and 9 bytes of process data output.

Offset	I/O	Function	Description
0, 2, 4, 6	I	Input AI 0..AI 3	Measuring range according to configuration
0, 2, 4, 6	O	Output AO0..AO 3	Measuring range according to configuration
8	I	Digital inputs .0 to .7	(Byte access)
8	O	Digital outputs .0 to .7	(Byte access)
9 ... 11	I	Reserved	
12,16	I	Counter 0, 1	Counter value (DINT, DWORD access)

Ordering data module

Identification	Order-no.	Packaging unit
Periphery module MIO84	PM-MIO84-02	PU: 1 piece
Connector 2x10pin with pin markings and bolt flanges on side	E-CONS20D-00	PU: 1 piece

Qualified personnel

All devices described in this manual may only be used, built up and operated together with this documentation. Installation, initiation and operation of these devices might only be done by instructed personnel with certified skills, who can prove their ability to install and initiate electrical and mechanical devices, systems and current circuits in a generally accepted and admitted standard.

Manuals, sample programs

Additional documentation by manuals is available as well sample applications at the download area of www.insevis.com in English language for free download.

Copyright

This and all other documentation and software, supplied or hosted on INSEVIS web sites to download are copyrighted. Any duplicating of these data in any way without express approval by INSEVIS GmbH is not permitted. All property and copy rights of these documentation and software and every copy of it are reserved to INSEVIS GmbH.

Trade Marks

INSEVIS refers that all trade marks of particular companies used in own documentation are reserved trade marks are property of the particular owners and are subjected to common protection of trade marks.

Disclaimer

All technical details in this documentation were created by INSEVIS with highest diligence. Anyhow mistakes could not be excluded, so no responsibility is taken by INSEVIS for the complete correctness of this information. This documentation will reviewed regularly and necessary corrections will be done in next version. With publication of this data all other versions are no longer valid.

Disposal



Do not throw old appliances in the household waste! In the interest of environmental protection, old appliances must be collected separately from unsorted municipal waste. You can find out more about the proper disposal / return of your old appliance at www.insevis.com/disposal.

Attention: The deletion of personal data on the old devices to be disposed of is the responsibility of the end user.

With publication of this information all other versions are no longer valid.